




2210 Series Horizontal Conveyor




The 2210 Horizontal Conveyor features a **low profile** yet extremely rigid **anodized extruded aluminum frame** • angle adjustment of 0-30 degrees • 2 ply, **polyurethane, FDA approved belt** with endless finger splice • fully **recessed belt edges** both on top and bottom of conveyor frame • soft drop zone to cushion product-fall • minimal gap of 1/16" between belt and side rails • **infinite leg adjustments** in height and location along frame • **enclosed drive, pulley** and transition roller system insure maximum operator safety • fully assembled • **2 year limited warranty** and are designed to run 24 hrs/day, 7 days/week



2210 with lane divider

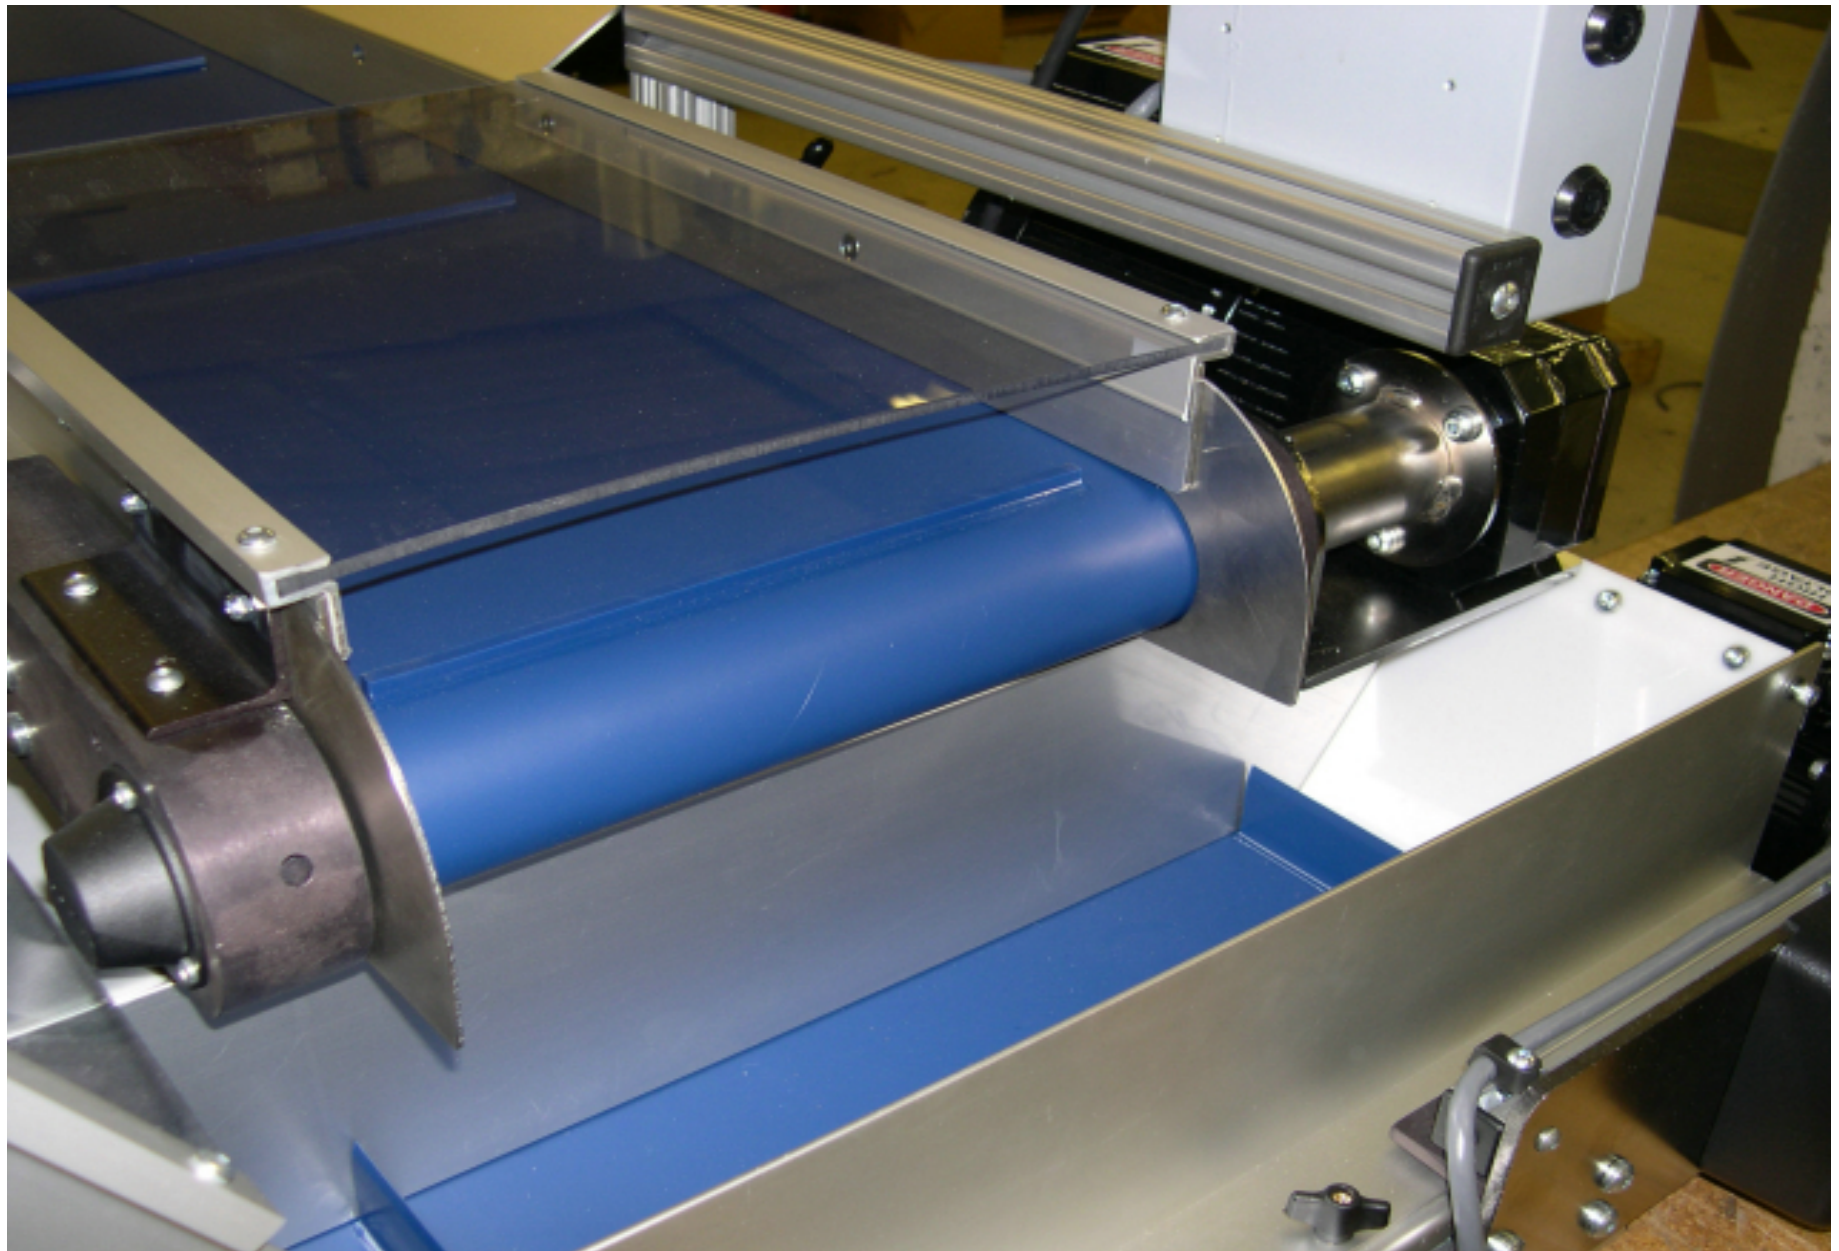


2210 with take up rails and lexan cover

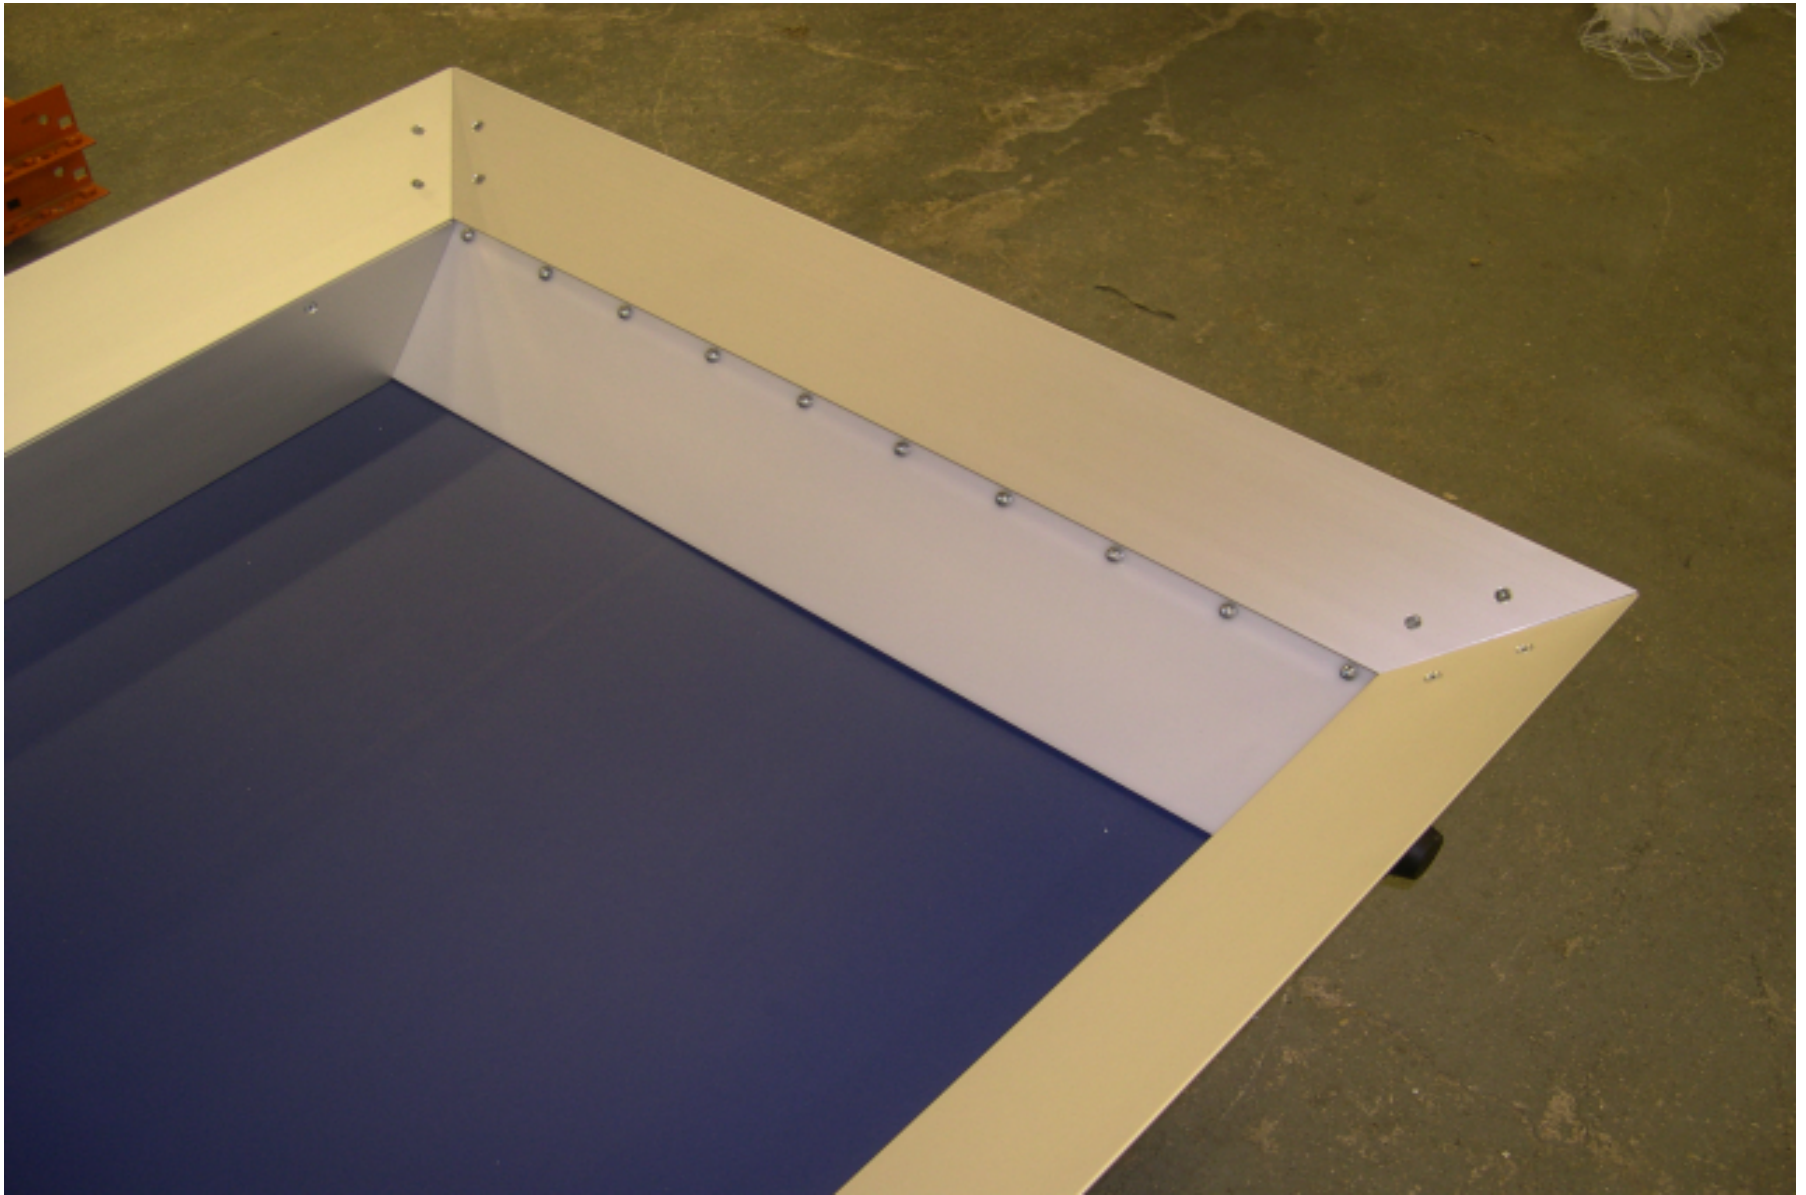

2210 with Flared Side Rails



2210 with Indexing, Variable Speed Drive and Standard Motor Mount

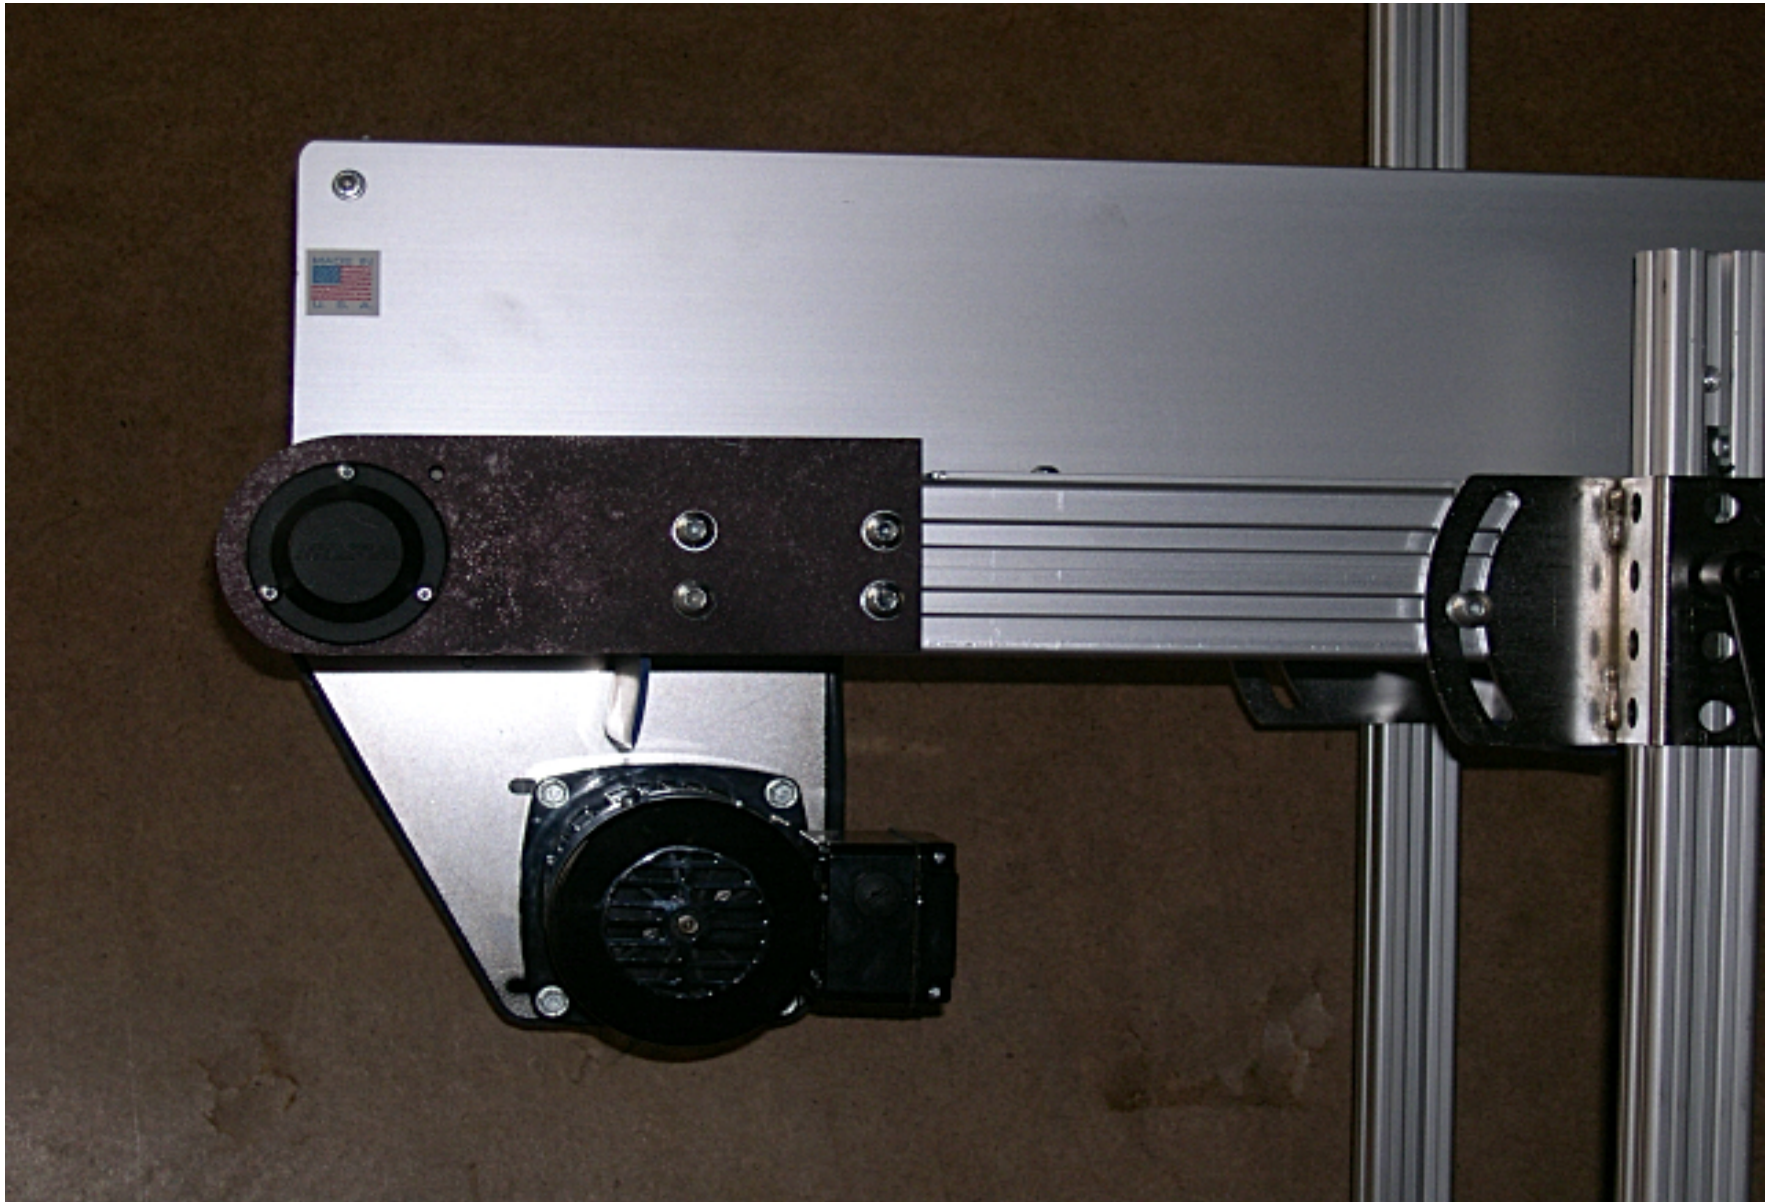

2210 Standard Motor Mount



2210 with Extended Flared Side Rails and Cooling Fan with Variable Speed Drive and Low Profile T-leg Set




2220 Series Incline Conveyor




The 2220 Incline Conveyor features a a **low profile** yet extremely rigid **anodized extruded aluminum frame** • angle adjustment of 0-30 degrees • 2 ply, **polyurethane, FDA approved belt** with endless finger splice and **1.6" tall cleats on 15" centers** standard • fully **recessed belt edges** both on top and bottom of conveyor frame • soft drop zone to cushion product-fall • stainless in-feed hopper • minimal gap of 1/16" between belt and side rails • **infinite leg adjustments** in height and location along frame • **enclosed drive, pulley** and transition roller system insure maximum operator safety • fully assembled • **2 year limited warranty** and are designed to run 24 hrs/day, 7 days/week



2220 with Stainless Rails and Standard In-feed Hopper

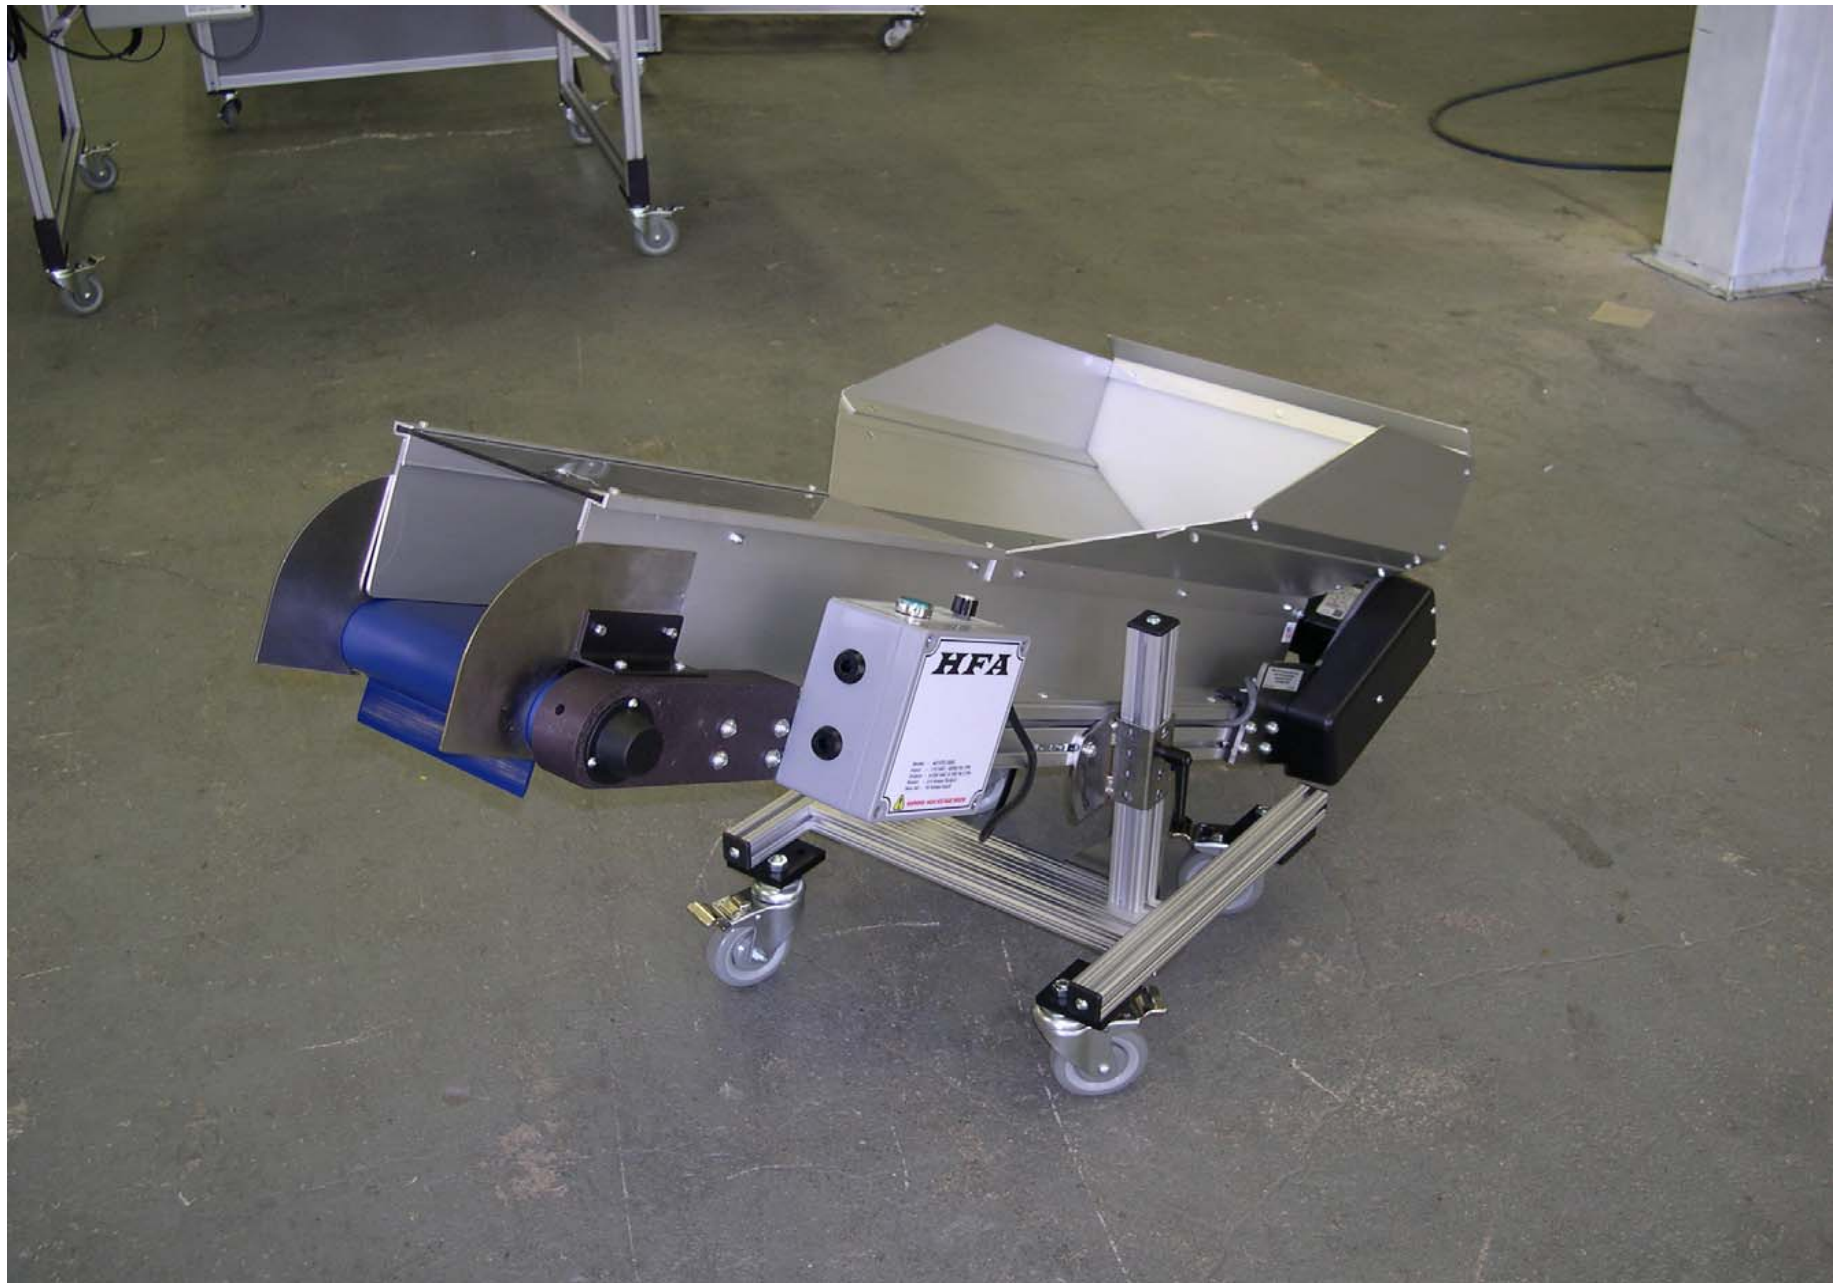

2220 with Take-up Rail, Lexan Cover, Variable Speed Drive and Extended Hopper

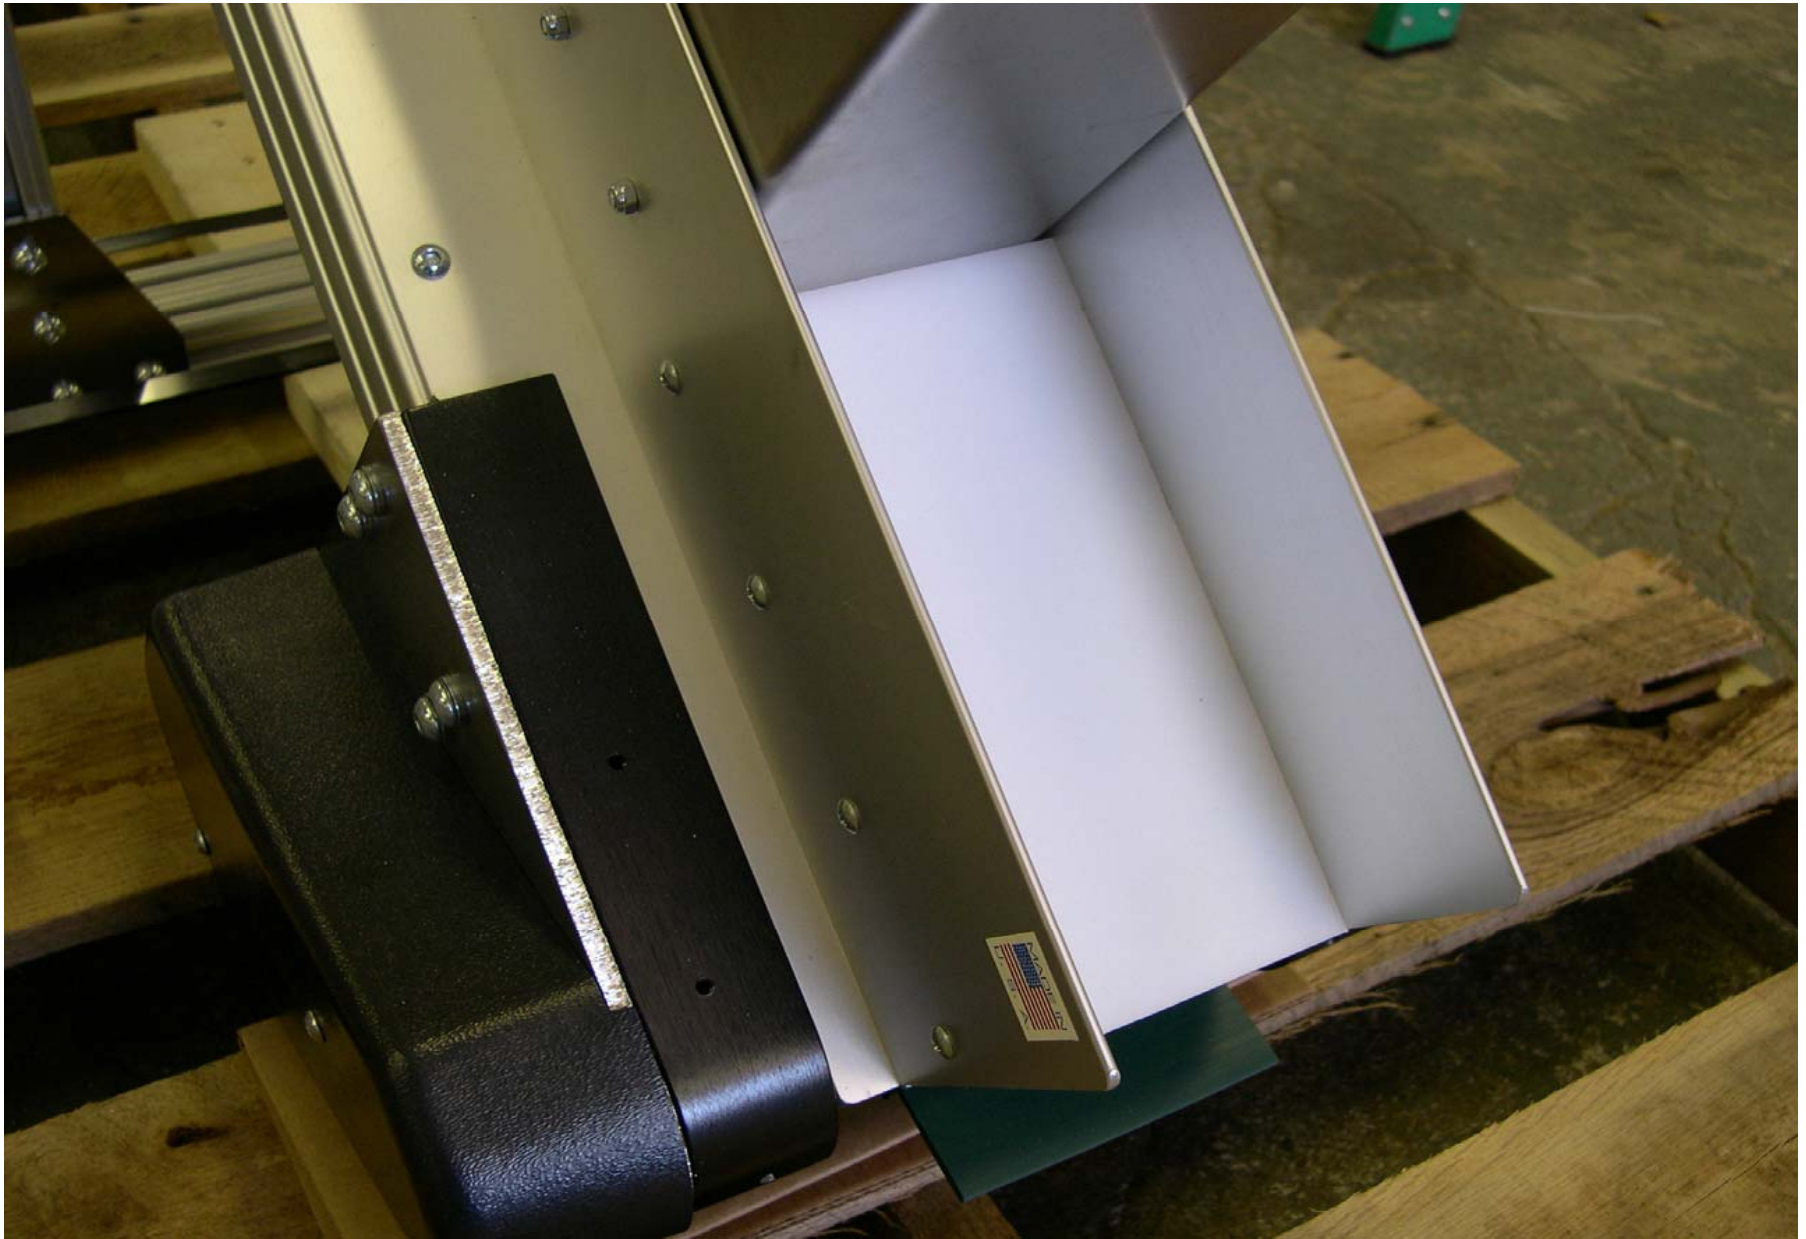

2220 with Tunnel Escapement



2220 with Stainless Steel Side Rails and Take-Up Rails

HFA

2230 Series

Horizontal to Incline Conveyor



The 2230 Incline Conveyor features a a **low profile** yet extremely rigid **anodized extruded aluminum frame** • angle adjustment of 0-30 degrees • 2 ply, **polyurethane, FDA approved belt** with endless finger splice and **1.6" tall cleats on 15" centers** standard • fully **recessed belt edges** both on top and bottom of conveyor frame • soft drop zone to cushion product-fall • stainless in-feed hopper • minimal gap of 1/16" between belt and side rails • **infinite leg adjustments** in height and location along frame • **enclosed drive, pulley** and transition roller system insure maximum operator safety • fully assembled • **2 year limited warranty** and are designed to run 24 hrs/day, 7 days/week




HFA 2210 Model Conveyors Feeding 2230's
Going Thru the Wall Shown with Diamond-Plate Steps





2230 with Flared Side Rails and Off-End Motor

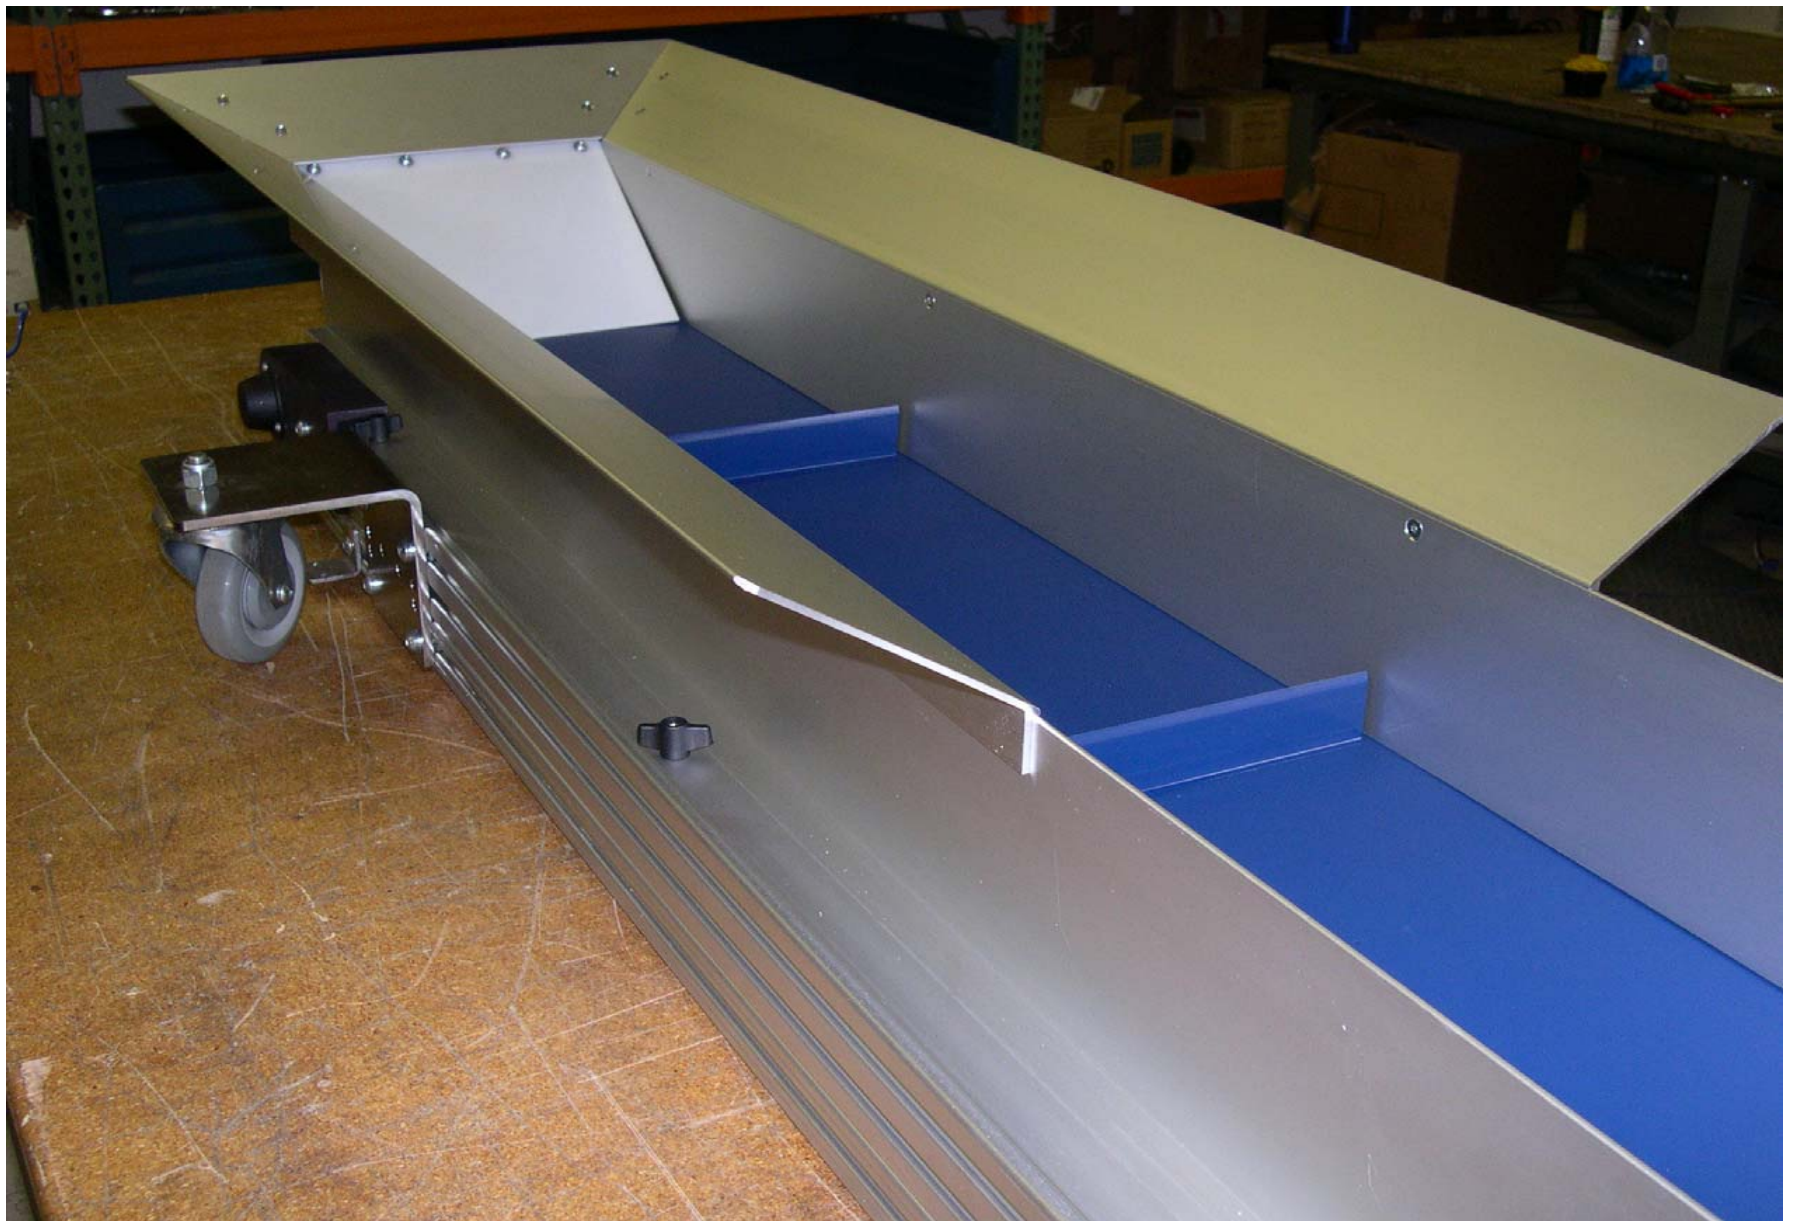

2230 with Flared Side Rails and Outrigger Casters



2230 Fed By Under-Press 2210



2230 with Plastic-Link Belting and Right-Angle Motor on Discharge End



2230 with Step-Plate, Flared In feed Rails, Right-Angle
Motor and Discharge Tray



2230 with Flared Indeed Rails



2230 with Flared Indeed Rails, Reversing Control and
Scissor-Lift Leg Assembly...in “UP” Position



2230 with Scissor-Lift Leg Assembly in “DOWN” Position

HFA

2240 Series

Horizontal To Decline Conveyor



The 2240 Incline Conveyor features a a **low profile** yet extremely rigid **anodized extruded aluminum frame** • angle adjustment of 0-50 degrees • 2 ply, **polyurethane, FDA approved belt** with endless finger splice and **1.6" tall cleats on 15" centers** standard • fully **recessed belt edges** both on top and bottom of conveyor frame • soft drop zone to cushion product-fall • stainless in-feed hopper • minimal gap of 1/16" between belt and side rails • **infinite leg adjustments** in height and location along frame • **enclosed drive, pulley** and transition roller system insure maximum operator safety • fully assembled • **2 year limited warranty** and are designed to run 24 hrs/day, 7 days/week



HFA 2240 Model Conveyors with Black Textured Belts



HFA 2240 Model Conveyor with White Textured Belt and Robot Guarding

HFA

2250 Series

“Z” Style Conveyor



The “Z” style conveyor features a **low profile** yet extremely rigid **anodized extruded aluminum frame** • angle adjustment of 0-50 degrees • 2 ply, **polyurethane, FDA approved belt** with endless finger splice and **1.6” tall cleats on 15” centers** standard • fully **recessed belt edges** both on top and bottom of conveyor frame • soft drop zone to cushion product-fall • stainless in-feed hopper • minimal gap of 1/16” between belt and side rails • **infinite leg adjustments** in height and location along frame • **enclosed drive, pulley** and transition roller system insure maximum operator safety • fully assembled • **2 year limited warranty** and are designed to run 24 hrs/day, 7 days/week



2250 “Z” Style Conveyor Feeding a Tote-Loading / Unloading Station



2250 “Z” Style Plant-wide System

HFA

2260 Series Elevator Conveyor



The 2260 conveyor features a a **low profile** yet extremely rigid **anodized extruded aluminum frame** • angle adjustment of 0-50 degrees • 2 ply, **polyurethane, FDA approved belt** with endless finger splice and **1.6" tall cleats on 15" centers** standard • fully **recessed belt edges** both on top and bottom of conveyor frame • soft drop zone to cushion product-fall • stainless in-feed hopper • minimal gap of 1/16" between belt and side rails • **infinite leg adjustments** in height and location along frame • **enclosed drive, pulley** and transition roller system insure maximum operator safety • fully assembled • **2 year limited warranty** and are designed to run 24 hrs/day, 7 days/week



2260 Elevator with Custom-sized In-feed Hopper



2260 with Discharge Tray and 2" Tall Cleats

HFA

2270 Series

Gravity Roller Conveyor



The Gravity Roller conveyor features a a **low profile** yet extremely rigid **anodized extruded aluminum frame** • angle adjustment of 0-50 degrees • **infinite leg adjustments** in height and location along frame • fully assembled • **2 year limited warranty** and are designed to run 24 hrs/day, 7 days/week



2270 Gravity roller with a 90° Curve



2270 Gravity roller off a Box-Fill System



2270 Gravity Roller on Top-Level of Auto-Q2 Box-Fill System



2270 Gravity Roller Attached to Inline Box-Fill System on a Packaging Machine

HFA

2280 Series Powered Roller Conveyor



The Powered Roller conveyor features a a **low profile** yet extremely rigid **anodized extruded aluminum frame** • angle adjustment of 0-50 degrees • **infinite leg adjustments** in height and location along frame • fully assembled • **2 year limited warranty** and are designed to run 24 hrs/day, 7 days/week